
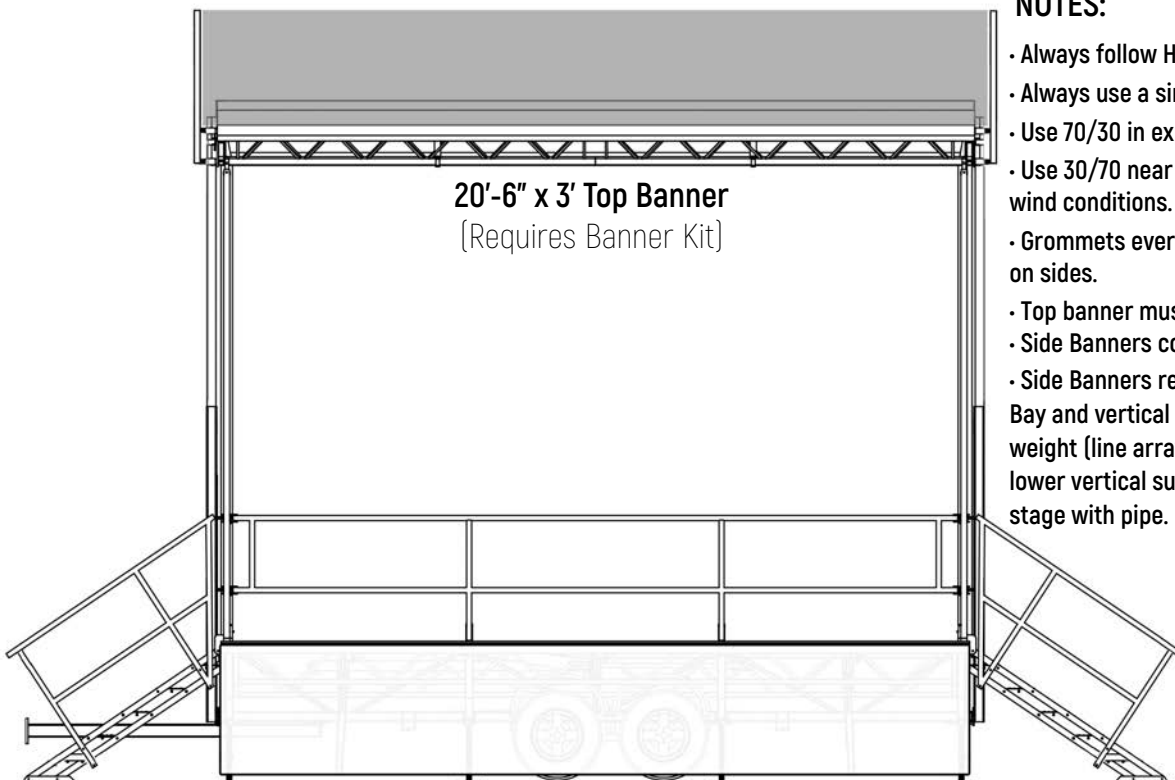




EuroStage ES-2016 Banner Specs

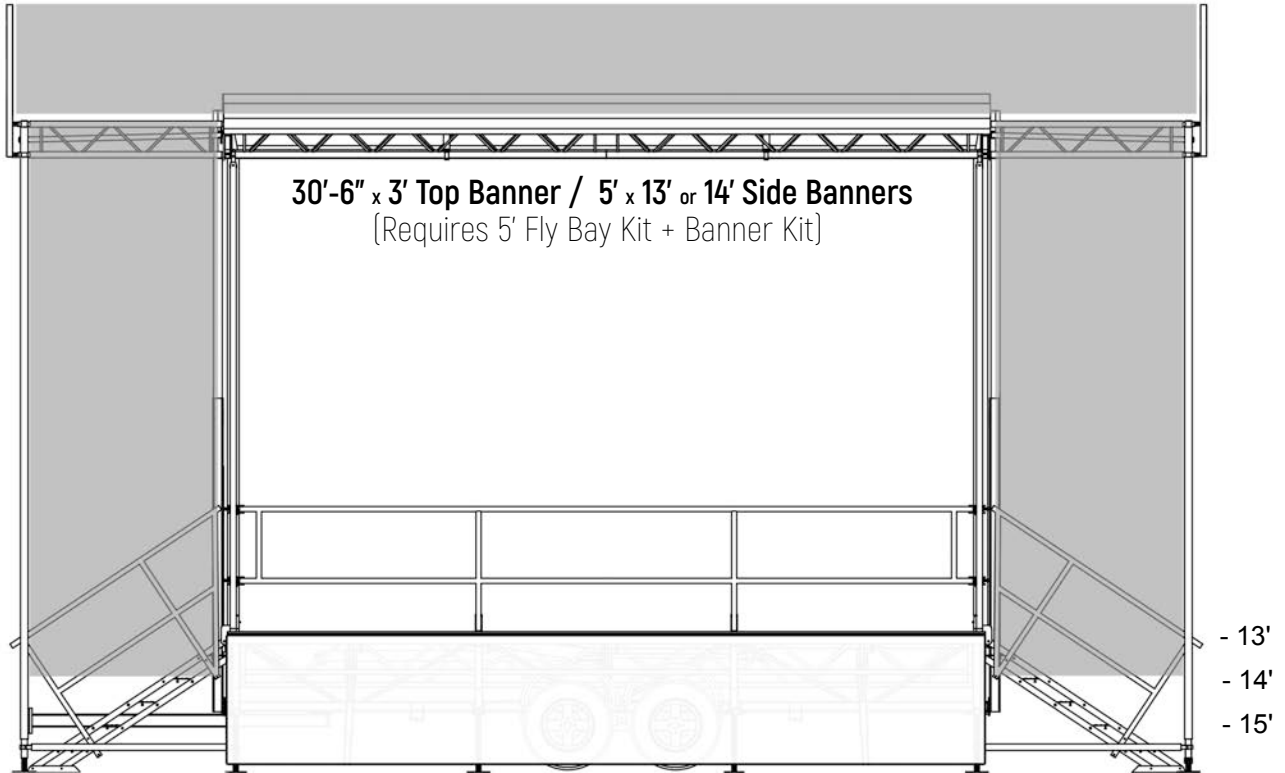

NOTES:

- Always follow HWAP requirements.
- Always use a single blow through mesh banner.
- Use 70/30 in expected normal weather conditions.
- Use 30/70 near beaches, mountains or expected high wind conditions.
- Grommets every 2' on top and bottom, none needed on sides.
- Top banner must connect to 4 banner post eye-bolts.
- Side Banners connect to Banner Offset Bar.
- Side Banners require a min. 375 lbs of weight on Fly Bay and vertical support post. If you do not have weight (line arrays) on Fly Bay, you must anchor the lower vertical support post back to the frame of the stage with pipe.

EuroStage ES-2620 Banner Specs

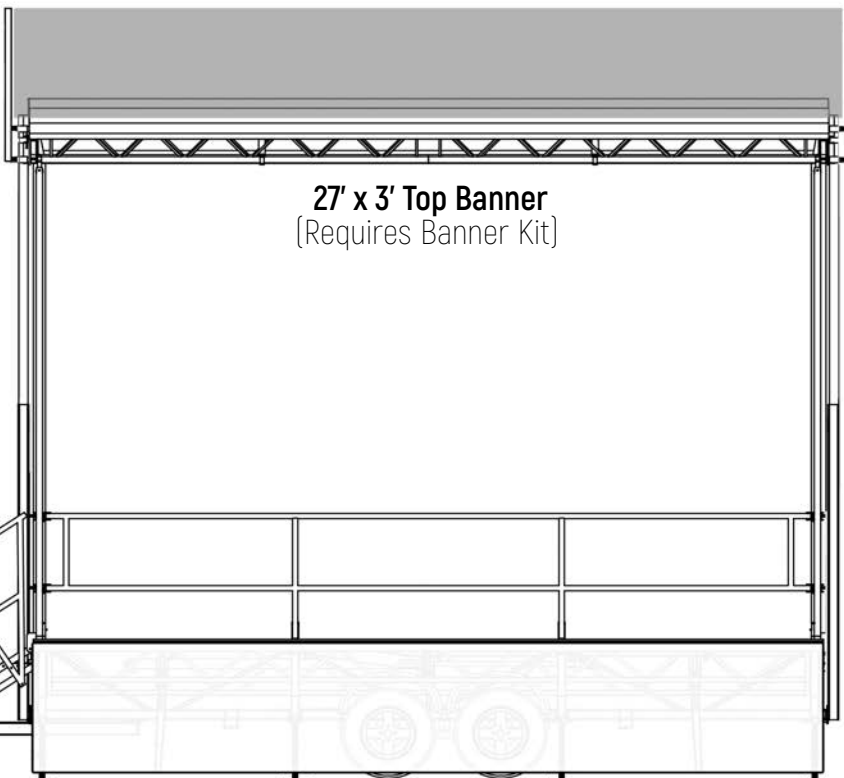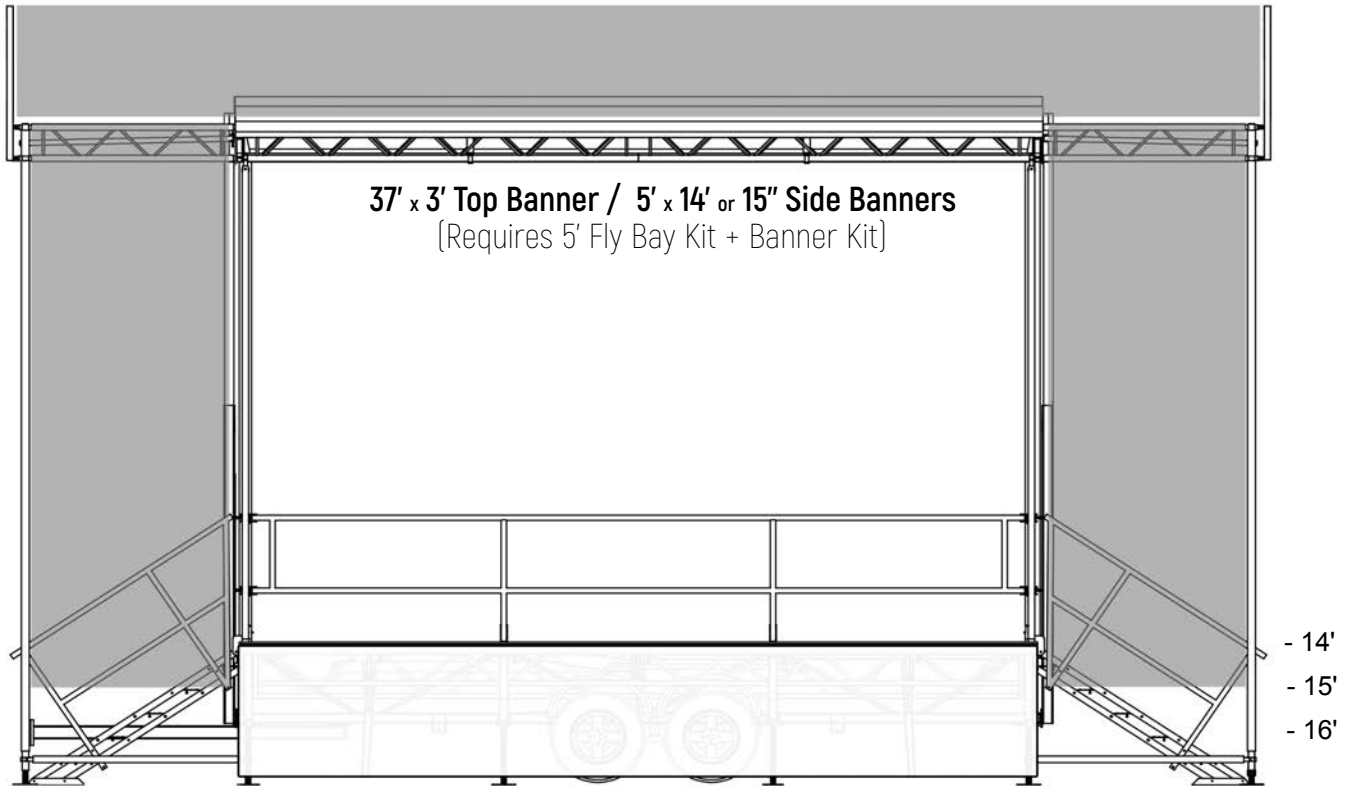

NOTES:

- Always follow HWAP requirements.
- Always use a single blow through mesh banner.
- Use 70/30 in expected normal weather conditions.
- Use 30/70 near beaches, mountains or expected high wind conditions.
- Grommets every 2' on top and bottom, none needed on sides.
- Top banner must connect to 4 banner post eye-bolts.
- Side Banners connect to Banner Offset Bar.
- Side Banners require a min. 375 lbs of weight on Fly Bay and vertical support post. If you do not have weight (line arrays) on Fly Bay, you must anchor the lower vertical support post back to the frame of the stage with pipe.